

B110TI

Wax-Resin • Flat head

Standard

- Higher heat resistance up to 110°C
- Good scratch and smear resistance
- Applicable to a wide range of receiving labels: paper, top-coated paper, PET/PP/PE/ PVC films.
- Ricoh's unique coating on the back allows reliable and superior matching qualities with the thermal head

PRINTING PROPERTIES

Maximum printing speed 10 IPS

	Non top-coated paper	Top-coated paper	PET	PE	PP	PVC
Compatibility	✓	✓	✓	✓	✓	✓
Image density	1.43	1.92	1.88	1.87	1.98	1.83

Note: Smoothness Bekk for paper family must be over 200s.



Image resolution for paper & film:

Minimum size: - For the lines: 0.1mm - For the characters: 1.0mm

RIBBON PROPERTIES

- Total ribbon thickness: < 9 µm
- Polyester film thickness: 4.5 µm
- Friction coefficient: < 0.035
- Ink melting point: 84°C
- Tearing resistance: > 200N/mm²
- Transmission density: 1.00 mini

CERTIFICATES/ DIRECTIVES



Application



Tags



Storage/
Shipping



Multi purpose
label



Scan to visit product's page

GENERAL CONDITION

Usage conditions: 5 to 35°C at 30 to 85% of relative humidity.

Storage conditions: Keep indoor avoiding high temperature, high humidity, direct sunlight.


Storage life: 12 months after slitting day.

RICOH
imagine. change.

PRINTED IMAGE DURABILITY

TESTS	RESULT
Smear + heat 30°C	ANSI A
Smear with cardboard (weight 1kg - 50 back & forwards)	
Heat (110°C)	No ink on the cotton fabric
Heat gradient 3.6kgF/cm ²	
Scratch	ANSI A
50 back and forwards with a rub tester	
Light	ANSI A
Xenon lamp at 650W/m ²	
Water	ANSI A
24 hours in water	

B110TI DURABILITY

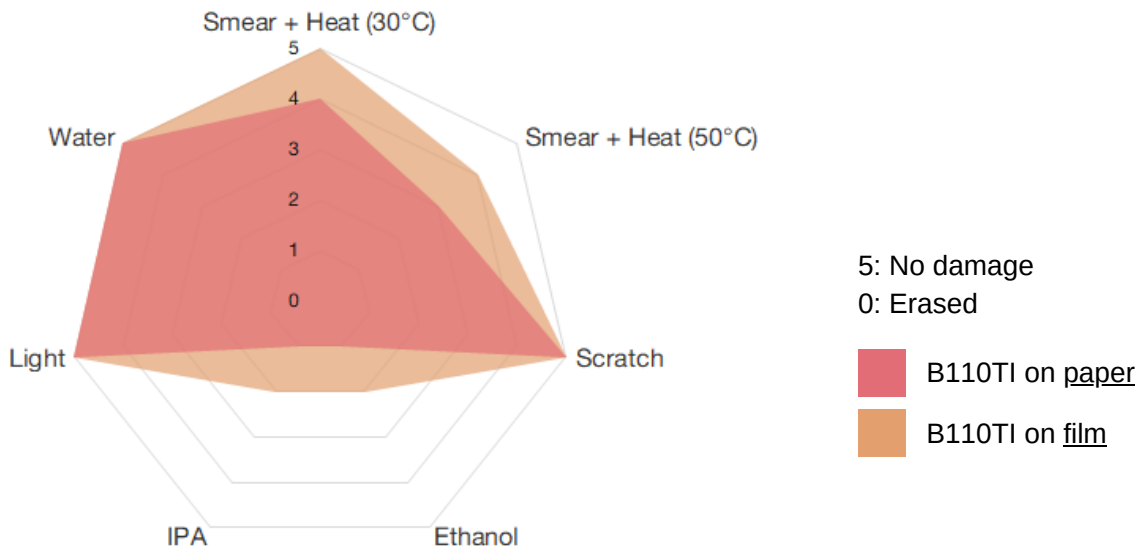

These performances are for guidance only. Results are obtained with adapted receiving material and optimum print conditions. (Ricoh test method)

RICOH VIETNAM COMPANY LTD.

F17, E.Town Central, 11 Doan Van Bo, Ward 13, District 4, HCM City

Tel: +84 28-3528-5252

Fax: +84 28-3636-7211

Email: thermal@ricoh.com.vn

Website: <https://ricoh.com.vn/products/thermal>



Scan to visit product's page

* Specifications are subjected to change without notice.

* The color(s) of the actual product may vary from the color(s) shown in this datasheet